


Line Power 17-0043 Low Voltage Impedence Ground Monitor

Product
Data
Sheet

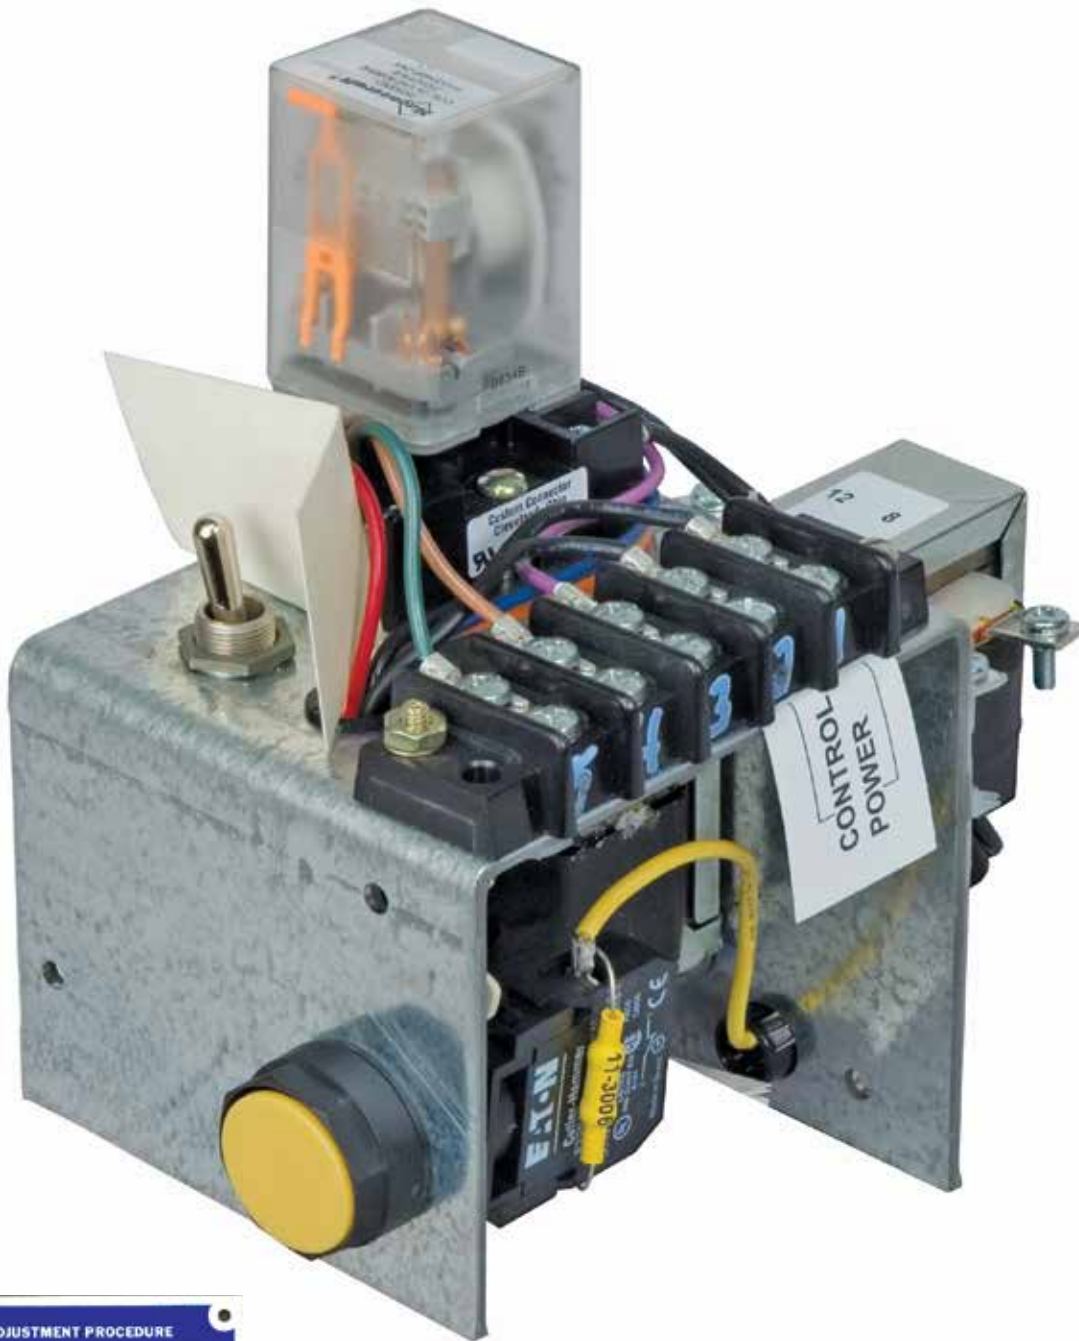

GMS ADJUSTMENT PROCEDURE

- 1) Make certain ground and pilot wires are intact and properly wired.
- 2) Select tap on transformer on back of monitor. Begin with Tap #8.
- 3) Turn potentiometer fully clockwise.
- 4) Depress test button.
- 5) Slowly turn potentiometer counterclockwise until the relay drops out. The dropout point is identified by a "buzzing" of the relay.
- 6) Release test button. The adjustment is complete.

NOTE: If relay fails to pick up, select a higher tap. The #16 tap is unusable.

11-2008



